



WESTFALL ISUZU TRUCK

Jim Shull | 816-459-3108 | jshull@westfallgmc.com

FlowMark 2020 Isuzu Gas FE1



Prepared for Jose Molina at SkyMark

Current report content is based on data as of 2020-09-04 13:51:49. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



WESTFALL ISUZU TRUCK

Jim Shull | 816-459-3108 | jshull@westfallgmc.com

FlowMark 2020 Isuzu Gas FE1 (2020 NPR-HD Gas Cab Chassis, FE1 109", 14,500 GVWR. White, Standard model specifications with power windows and door locks

Selected Model and Options

Code	Description	Weight	MSRP
Model			
FE1	NPR-HD Gas Cab Chassis 109		\$45,160.00
04	White, Standard model specifications with power windows and door locks		\$0.00
Tires			
I5H	LRR (low rolling resistance)	0.0 lbs.	Inc.
Engine			
L96	GMPT-V8 8 cylinder V block, four cycle overhead valve water cooled Vortec 6 Liter SFI V8. Electronically controlled sequential port fuel injection. Six bolt main cap design for heavy duty performance. Engine Control Module (ECM) and Transmission Control Module (TCM) engine control system. Engine cruise control, engine oil cooler.	0.0 lbs.	Inc.
Engine Rating			
I7B	297 HP gross @ 4300 RPM; 372 lb.-ft. gross torque @ 4000 RPM	0.0 lbs.	Inc.
Transmission			
MYD	6L90-E Hydra-Matic, 6-speed automatic with lock-up converter and overdrive. Ratios: Gear and Ratios 4.027, 2.364, 1.532, 1.152, 0.0852, 0.667, Rev. 3.064:1	0.0 lbs.	Inc.
Wheelbase			
IA8	109 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in ³ RBM 316,800 lb./ft./in. per rail.	0.0 lbs.	Inc.
Air Cleaner			
KNX	Dry paper single element. Air cleaner canister standard with air restriction gauge.	0.0 lbs.	Inc.
Alternator			
IL2	145 Amp. output with integral regulator.	0.0 lbs.	Inc.
Battery			
IL3	Single Delco 12-V maintenance free 750 CCA frame mounted battery box	0.0 lbs.	Inc.
Exhaust			
I41	Single horizontal aluminized steel with catalytic converter and oxygen sensor devices.	0.0 lbs.	Inc.
Front Axle			
ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.	0.0 lbs.	Inc.
Front Suspension			
ID8	8440 lbs. Capacity semi elliptical tapered leaf spring. Includes shock absorbers and stabilizer bar	0.0 lbs.	Inc.
Front Wheels			
IB9	19.5" x 6", 6-hole disc, painted white	0.0 lbs.	Inc.
Front Tires			

Current report content is based on data as of 2020-09-04 13:51:49. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



WESTFALL ISUZU TRUCK

Jim Shull | 816-459-3108 | jshull@westfallgmc.com

FlowMark 2020 Isuzu Gas FE1 (2020 NPR-HD Gas Cab Chassis, FE1 109", 14,500 GVWR. White, Standard model specifications with power windows and door locks

Selected Model and Options

Code	Description	Weight	MSRP
I8B	225/70R19.5G (14 ply) tubeless Radial, all season tread	0.0 lbs.	Inc.
Rear Suspension			
I8J	12,900 lbs. Capacity semi elliptical; main and auxiliary multi- leaf spring. Includes shock absorbers.	0.0 lbs.	Inc.
Rear Axle			
I36	R040, single-speed, 11,020 lb. capacity with oil lubricated rear wheel bearings.	0.0 lbs.	Inc.
Ratio			
092	4.300:1	0.0 lbs.	Inc.
Rear Wheels			
IC1	19.5" x 6", 6-hole disc, painted white	0.0 lbs.	Inc.
Rear Tires			
I9B	225/70R19.5G (14 ply) tubeless Radial, all season tread.	0.0 lbs.	Inc.
Fuel Tank			
IG5	30 gal. rectangular fuel tank. Mounted between frame rail with electric type fuel pump (mounted in tank). Through the rail fuel fill.	0.0 lbs.	Inc.
Seat			
AQB	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.	0.0 lbs.	Inc.
Brakes			
IR8	Dual circuit, vacuum assisted hydraulic with EBD (Electronic Brake Distribution). Disc front and self-adjust outboard mounted drum rear. Mechanical, transmission mounted parking brake. Non-asbestos semi metallic linings are standard. 4 channel anti-lock brake system.	0.0 lbs.	Inc.
Air Conditioning			
C60	Air conditioner	0.0 lbs.	Inc.
Power Windows & Door Locks			
IL0	Yes	0.0 lbs.	Inc.
Model Option			
04	White, Standard model specifications with power windows and door locks	0.0 lbs.	Inc.
Additional Options			
IF6	Fire Extinguisher and Triangle Kit mounted in rear organizer on standard cab and under rear seat on crew cab	19.0 lbs.	\$88.00
UZF	Back up alarm	1.0 lbs.	\$112.00
Accessories			
IX2	Rear body dome lamp switch	0.1 lbs.	Inc.
8RP	AM/FM/CD radio with Aux input/USB port and Bluetooth RPO	0.0 lbs.	Inc.
Totals			
	Base Price		\$45,160.00

Current report content is based on data as of 2020-09-04 13:51:49. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



WESTFALL ISUZU TRUCK

Jim Shull | 816-459-3108 | jshull@westfallgmc.com

FlowMark 2020 Isuzu Gas FE1 (2020 NPR-HD Gas Cab Chassis, FE1 109", 14,500 GVWR. White, Standard model specifications with power windows and door locks

Selected Model and Options

Code	Description	Weight	MSRP
	Destination Charge		\$1,325.00
	DEF Fill Charge		\$0.00
	Total Options Price		\$200.00
	Tire Weight Tax		\$26.64
	Total		\$46,711.64

Current report content is based on data as of 2020-09-04 13:51:49. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.




WESTFALL ISUZU TRUCK

Jim Shull | 816-459-3108 | jshull@westfallgmc.com

FlowMark 2020 Isuzu Gas FE1 (2020 NPR-HD Gas Cab Chassis, FE1 109", 14,500 GVWR. White, Standard model specifications with power windows and door locks

Weight Distribution

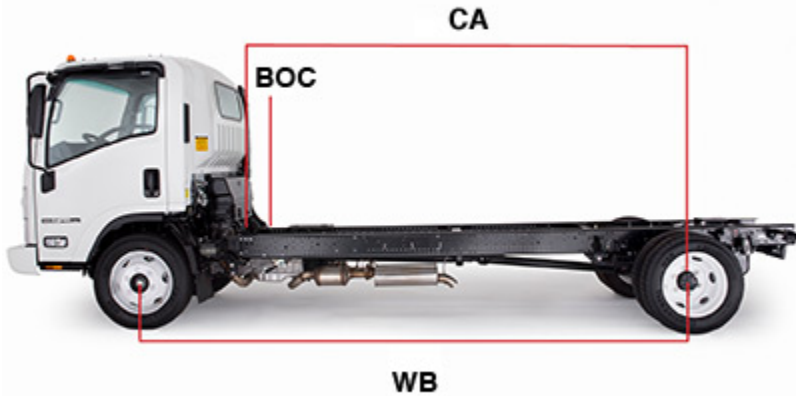

Driver/Passenger Weight	350.0 lbs.
Wheelbase (WB)	109 inches
Cab to Axle(CA)	86.5 inches
Body Length	
Body Weight	
Cab to Body (BOC)	6.5 inches

**** You must fill in body length and weight to enable body and payload weight calculations.**

Front Wt.	3,799.00 lbs.	67%
Rear Wt.	1,897.00 lbs.	33%
GVWR	14,500.00 lbs.	
GVW	5,696.00 lbs.	
Remaining Payload Weight	8,804.00 lbs.	

Weight (lbs.)	Front	Rear	Total
Chassis	3,430.00	1,896.00	5,326.00
Chassis Equipment	19.00	1.00	20.00
Subtotal	3,449.00	1,897.00	5,346.00
Driver/Passengers	350.00	0.00	350.00
Body/Body Equipment	0.00	0.00	0.00
Payload	0.00	0.00	0.00
Total	3,799.00	1,897.00	5,696.00
GAWR/GVWR	6,630.00	11,020.00	14,500.00
GCWR			20,500.00

Chassis Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
04	White, Standard model specifications with power windows and door locks		0.00 lbs.	0.00 lbs.	0.00 lbs.
IF6	Fire Extinguisher and Triangle Kit mounted in rear organizer on standard cab and under rear seat on crew cab		19.00 lbs.	0.00 lbs.	19.00 lbs.
UZF	Back up alarm		0.00 lbs.	1.00 lbs.	1.00 lbs.

Driver/Passengers:

	Center of Gravity	Front Axle	Rear Axle	Total
Driver	front axle	350.00 lbs.	0.00 lbs.	350.0 lbs.

Current report content is based on data as of 2020-09-04 13:51:49. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



WESTFALL ISUZU TRUCK

Jim Shull | 816-459-3108 | jshull@westfallgmc.com

FlowMark 2020 Isuzu Gas FE1 (2020 NPR-HD Gas Cab Chassis, FE1 109", 14,500 GVWR. White, Standard model specifications with power windows and door locks

Warranty

Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)		Percent of Dealer's Normal Charge Paid by Owner	
	Time	Vehicle Miles	Parts	Labor
Basic	0-3 Years	0-36,000	No Charge	No Charge
Engine	0-5 Years	0-75,000	No Charge	No Charge
• Transmission	0-5 Years	0-75,000	No Charge	No Charge
• Drive Axle				
• Driveshaft				
• Front Axle I-Beam				
• Crossmembers				
Frame Rails	0-3 Years	0-36,000	No Charge	No Charge
Frame Rails	3-5 Years	Unlimited	50%	50%
Engine Emissions Control System	0-5 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System California	0-3 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System California	0-7 Years	0-70,000	No Charge	No Charge
Tires	0-2 Years	0-24,000	No Charge	No Charge
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge

Current report content is based on data as of 2020-09-04 13:51:49. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.